

# 1250S-1


## Automatic Coil Winder



### Technical Specifications

Travel	RPM	AWG Limits	Arbor Size
7 in.	5000	26AWG	7mm

\*Custom Traverses based on your specific needs are also available. Contact Sales for details

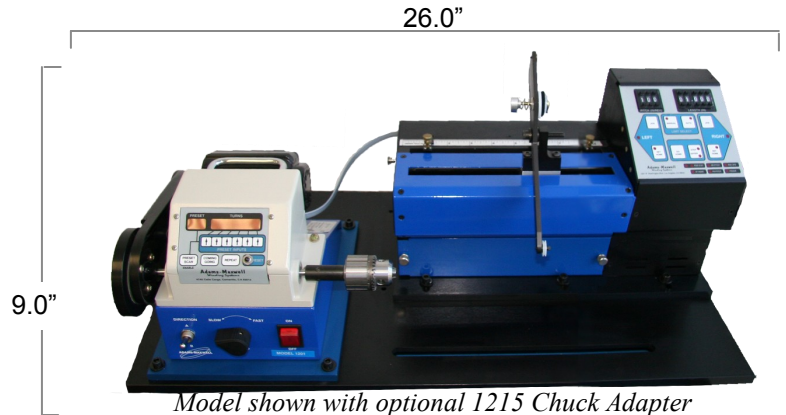

### General Specifications


- |                      |  |
|----------------------|--|
| Traverse Motor Type: | Stepper Motor Control                                    |
| Traverse Length:     | 7 Inches   |
| Arbor Size:          | 7mm Steel Shaft  |
| Motor Type:          | DC Motor, Triac Type Motor Speed Circuitry               |
| Braking:             | Dynamic  |
| Speed Control:       | Multi-Range Electronic Foot Control                      |
| Length Increments:   | Settable to .001 Inch                                    |
| Carriage Speed:      | 0.5 Inch Per Second                                      |
| Fine Pitch Mode:     | .00001 - .00999 in/rev                                   |
| Regular Pitch Mode:  | .0001 - .0999 in/rev                                     |
| Presets:             | 99 User Defined (Coil Winder) 32 User Defined (Traverse) |
| Winder Sensor:       | Photoelectric Pick-Off                                   |
| Power Requirements:  | 117V 50-60 Hz, 1 amp                                     |
| Dimensions:          | L x W x H = 26" x 12" x 9"                               |
| Weight:              | 60lbs  |




User Friendly Interface



High Quality Components

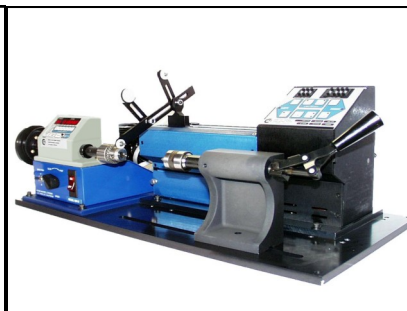

With 1201 Winder / Accessories



Custom Tooling Available

### Adams-Maxwell Winding Systems

4740 Calle Carga, Camarillo, CA 93012  
 Phone: (323) 936-8042 | Fax: (888) 936-8042  
 Email: Sales@adamsmaxwell.com  
[www.adamsmaxwell.com](http://www.adamsmaxwell.com)