

1250S-3AR

Automatic Coil Winder




Technical Specifications

Travel	RPM	AWG Limits	Arbor Size
7 in.	500	14AWG	0.50"

*Custom Traverses based on your specific needs are also available. Contact Sales for details

General Specifications

Traverse Motor Type:	Stepper Motor Control
Traverse Length:	7 Inches
Arbor Size:	0.500in. Steel Shaft
Motor Type:	DC Motor, Triac Type Motor Speed Circuitry
Braking:	Dynamic
Speed Control:	Multi-Range Electronic Foot Control
Length Increments:	Settable to .001 Inch
Carriage Speed:	0.5 Inch Per Second
Fine Pitch Mode:	.00001 - .00999 in/rev
Regular Pitch Mode:	.0001 - .0999 in/rev
Presets:	99 User Defined (Coil Winder) 32 User Defined (Traverse)
Winder Sensor:	Photoelectric Pick-Off
Power Requirements:	117V 50-60 Hz, 1 amp
Dimensions:	L x W x H = 26" x 12" x 9"
Weight:	60lbs

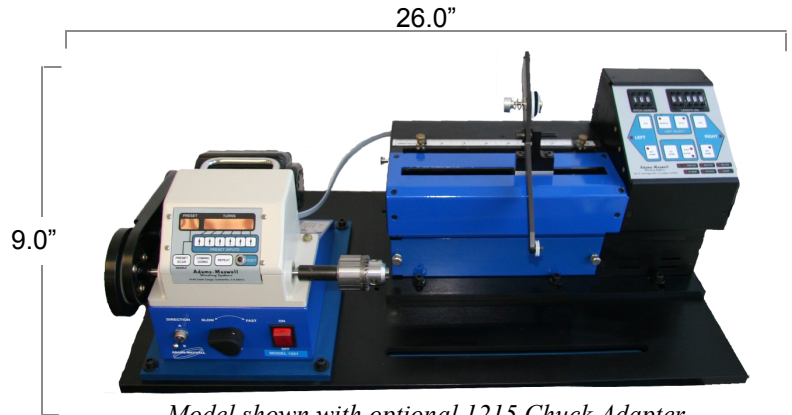


Model shown with optional 1215 Chuck Adapter




User Friendly Interface



High Quality Components

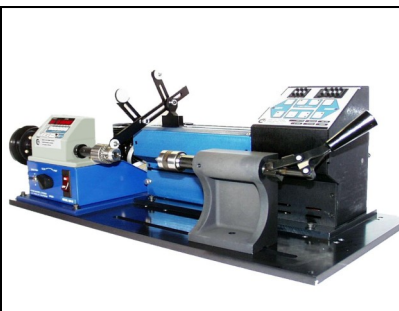

With 1201 Winder / Accessories



Custom Tooling Available

Adams-Maxwell Winding Systems

4740 Calle Carga, Camarillo, CA 93012
 Phone: (323) 936-8042 | Fax: (888) 936-8042
 Email: Sales@adamsmaxwell.com
www.adamsmaxwell.com