

1250S-3AX


Automatic Coil Winder



Technical Specifications

| Travel | RPM | AWG Limits | Arbor Size |
|--------|------|------------|------------|
| 7 in. | 1000 | 17AWG | 0.50" |

*Custom Traverses based on your specific needs are also available. Contact Sales for details

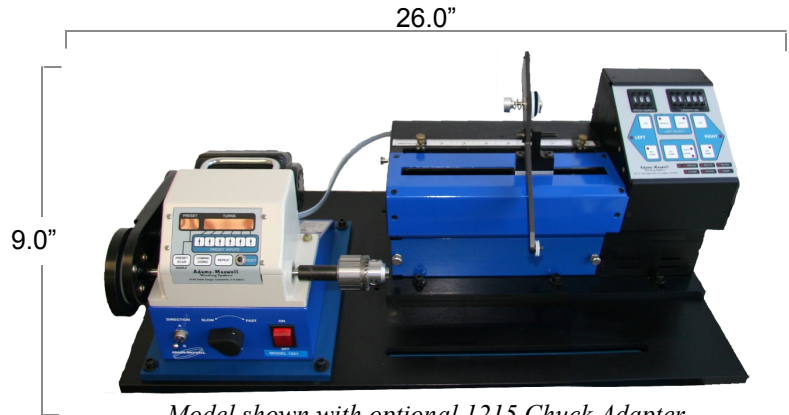

Model shown with optional 1215 Chuck Adapter



General Specifications


- Traverse Motor Type: Stepper Motor Control
- Traverse Length: 7 Inches
- Arbor Size: 0.500in. Steel Shaft
- Motor Type: DC Motor, Triac Type Motor Speed Circuitry
- Braking: Dynamic
- Speed Control: Multi-Range Electronic Foot Control
- Length Increments: Settable to .001 Inch
- Carriage Speed: 0.5 Inch Per Second
- Fine Pitch Mode: .00001 - .00999 in/rev
- Regular Pitch Mode: .0001 - .0999 in/rev
- Presets: 99 User Defined (Coil Winder) 32 User Defined (Traverse)
- Winder Sensor: Photoelectric Pick-Off
- Power Requirements: 117V 50-60 Hz, 1 amp
- Dimensions: L x W x H = 26" x 12" x 9"
- Weight: 60lbs




User Friendly Interface



High Quality Components

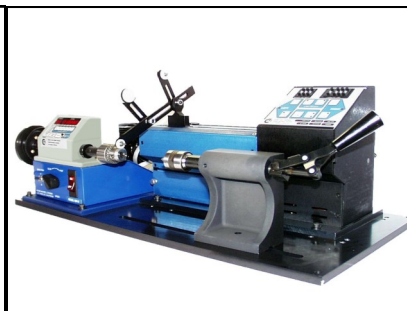

With 1201 Winder / Accessories



Custom Tooling Available

Adams-Maxwell Winding Systems

4740 Calle Carga, Camarillo, CA 93012
 Phone: (323) 936-8042 | Fax: (888) 936-8042
 Email: Sales@adamsmaxwell.com
www.adamsmaxwell.com